



# INSTALLATION GUIDE

**PART NUMBER: 15129**  
**REAR LIFTING COILOVER KIT**  
**FORD BRONCO 4WD | 2021+**

0" TO +4" HEIGHT ADJUSTABLE

300 W. PONTIAC WAY. CLOVIS, CA 93612  
PHONE: 800-445-3767 | EMAIL: [INFO@BELLTECH.COM](mailto:INFO@BELLTECH.COM)

# THANK YOU

Thank you for choosing our high quality Belltech product. We have spent a great deal of time developing our line of products so that you will receive maximum performance with minimal difficulty during installation. Soon your vehicle will be on the road looking and feeling much improved.

**Please take a moment to read all instructions and warnings prior to installation of your new Belltech product and before operating your vehicle. If you have any questions or concerns regarding any step in the installation process, please do not hesitate to call or email our customer support specialists who are trained to help you through any portion of this process.**

## Before You Begin:

**It is of the utmost importance that you confirm all of the components listed on the parts list is in the kit. You can find this list located on the last page(s) of your instructions. Do not begin installation if any part is missing. Instead, please call our Belltech customer service specialists.**

### Belltech Customer Support:

Phone: 1-800-445-3767

Email: [info@belltech.com](mailto:info@belltech.com)

## Safety Information:

**Warning:** Do not work under a vehicle supported only by a jack. Place support stands securely under the vehicle in the manufacturer's specified locations unless otherwise instructed.

Proper use of safety equipment and eye/face/hand protection is absolutely necessary when performing any of the following instructions.

We strive for an exceptional experience for all our valued customers. If for any reason you need assistance with your Belltech products, please do not return the product to the store you purchased from, but rather call our dedicated customer service experts, from 7am to 5pm PST.

We recommend that a qualified mechanic, at a properly equipped facility, perform this installation.

It is very helpful to have an assistant available during installation.

## Before Driving Your Vehicle:

It is important to double check all brake hoses, cables, and other components to be sure there is no interference. You must also check for wheel/tire to chassis/body interference. If any issues are found, review your installation instructions to be sure no steps were missed and any problems are corrected.

Make sure your vehicle is aligned immediately following installation.

Check all hardware and re-torque at intervals for the first 10, 100, and 1000 miles.

Some of Belltech's products are designed to improve your vehicle's off-road performance. Leveling/lifting your vehicle may result in an altered center of gravity. It is crucial to use extreme care when operating your vehicle to prevent rollover and/or loss of control.

Any changes in your vehicle's suspension may result in transformed handleability. Please test-drive your vehicle in a remote location so you can become accustomed to the revised driving characteristics.

Perform headlight check and adjustment.

Failure to drive any modified vehicle in a safe manner may result in harm or death.

Never operate your modified vehicle under the influence of drugs, alcohol, or lack of adequate sleep.

Always wear your seatbelt.



**DIFFICULTY:**



**INSTALLATION TIME:**

2-4 Hours + Alignment

## RECOMMENDED TOOLS:

- Properly rated floor jack
- Support stands
- Wheel chocks
- Metric socket wrench set
- Metric wrench set
- Tape measure
- Marking Pen

## SPECIALTY TOOLS:

- High quality spring compressor
- Torque wrench up to 350 ft lbs.



## FITMENT GUIDE

Minimum wheel specs: 17" diameter, 5" Backspacing

Maximum recommended tire size: 37" with 6" wheel backspacing



### Technician note:

Before making any adjustments to your new Belltech coilover, please be sure to loosen the set screw on the lower spring perch. Failure to do so will damage the threads. After the adjustments are made, you may then tighten the set screw to keep the settings in place.



## INSTALLATION PREPARATION:

Before beginning the installation process, measure the hub to fender heights for your vehicle and record them in the "Before" section. After your vehicle has been modified, record the new measurements in the, "After" section. This way, you can compare the resulting height to the original. When taking the measurements, measure vertically from the center of the wheel to the inner edge of the fender.

**Before:**

LF: \_\_\_\_\_

RF: \_\_\_\_\_

LR: \_\_\_\_\_

RR: \_\_\_\_\_



**After:**

LF: \_\_\_\_\_

RF: \_\_\_\_\_

LR: \_\_\_\_\_

RR: \_\_\_\_\_

# JACKING, SUPPORTING, AND PREPARING THE VEHICLE

1. Park your vehicle on a smooth, level, concrete or seasoned asphalt surface.
2. Block the front wheels of the vehicle using wheel chocks. Make sure the vehicle's transmission is in "PARK" (automatic) or 1st gear (manual).
3. Activate the parking brake.
4. Break loose, but do not spin the wheel lug nuts to ease in removal when the wheels are in the air.
5. Lift the rear of the vehicle off the ground using a properly rated floor jack. Lift the vehicle so the front tires are approximately 6-8 inches off the ground.
6. Place support stands rated for the vehicles weight. The stands should be positioned in the factory specified locations. (Refer to the owners manual). Prior to lowering the vehicle onto stands, make sure the support stands will contact the chassis. It is very important that the vehicle is properly supported to prevent any harm to ones self or to the vehicle.
7. Lower the vehicle slowly onto the stands.
8. Remove the rear wheels.



## Technician reminder:

Never work under a vehicle supported only by a jack. It is necessary to place support stands securely under the vehicle in the manufacturer's specified locations unless otherwise instructed.

## OEM STRUT REMOVAL


9. Remove the rear fender liners using a Philips screw driver. There will be 10 clips and 3 screws holding each liner in place.



10. Support the axle with a jack.
11. Remove lower strut bolts with a 27mm socket.



12. Remove upper strut bolts with a 15mm wrench.

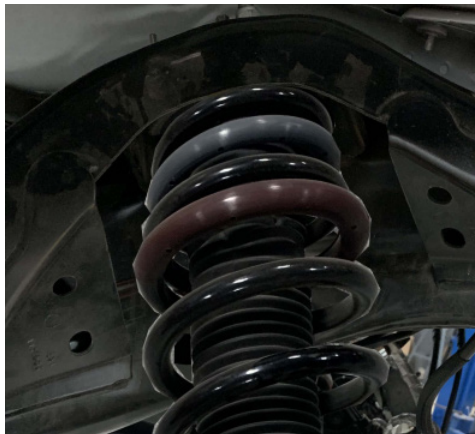

13. Remove the strut from the vehicle.



# STRUT DISASSEMBLY

- Using a proper spring compressor, mount the strut assembly and ensure it is secured before proceeding. To ease the installation of the new strut, mark the position of the top mount in relationship to the upper spring isolator and strut body. Compress the spring until tension is relieved from the strut.




## Technician note:

The coil spring is held in place under extreme compression. **Belltech** recommends the use of a heavy-duty spring compressor suitable for truck springs to perform the following steps. If unsure of your spring compressor capabilities, please take your struts to a professional installer. Use caution during the following steps to avoid personal injury and/or damage to the vehicle.



- Support the strut to prevent it from falling from the fixture as you remove top mount and the strut. You will use this with your new Belltech coilover later.

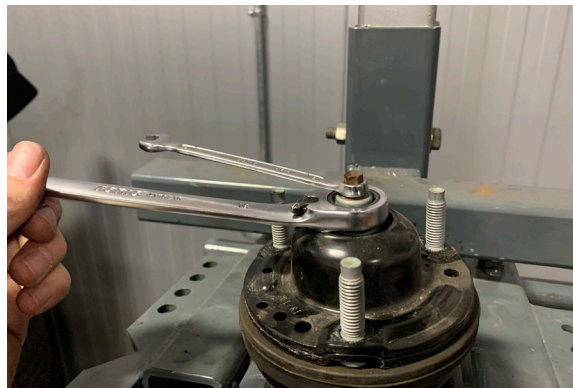

- Remove the rubber upper spring isolator from the OE top mount. This will not be reused.



- Remove the spring and strut from the fixture.

# BELLTECH COILOVER HEIGHT SETUP AND ASSEMBLY

18. The coilover comes as shown below. Remove the Nyloc nut from the top of the Belltech coilover to proceed.



19. Confirm the vent disk is located on the strut, under the dust boot. If for any reason your vent disk is not present, please call our technical support staff before proceeding, driving on the strut without it could cause premature shock to failure.


20. Using the table below as reference, remove the main spring and slide the required packers first, then the dust cover, and the bump stop onto the strut rod.



## Technician note:

Belltech uses packers to maintain the correct bump stop engagement at various height ranges. Using the appropriate packer will prevent excessive body roll. If a packer is needed, according to the charts to the right, please place the packer on top of the vent disc, channel side down, as shown by the image below this text box.

2021+ Ford Bronco 4WD	
Lift (Inches)	15mm Packer
0"	0 *1 if using 35" tires
1"	1
2"	2
3"	3
4"	4

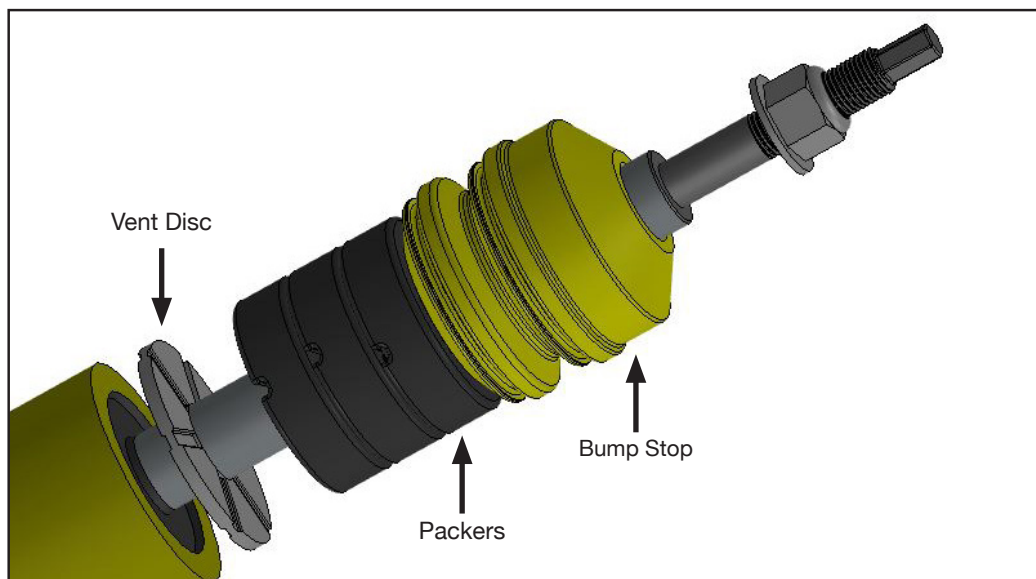

# BELLTECH COILOVER HEIGHT SETUP AND ASSEMBLY

21. Loosen the set screw on the spring perch.




22. Using the provided spanner wrench, turn the bottom spring perch to obtain desired spring perch height, measuring from the top of the perch to the center of the bushing. Find the appropriate spring perch height by referencing the table below. We do not recommend adjusting outside of the specified height range, as the performance of the shock may decrease greatly.

2021+ Ford Bronco 4WD	
Lift (Inches)	Perch height (milli-meters/inches)
0"	176mm / 6.9in
1"	194mm / 7.6in
2"	212mm / 8.3in
3"	230mm / 9.1in
4"	248mm / 9.8in



### Technician note:

Your vehicle's exact ride heights may vary due to differences in chassis and trim levels. The perch heights depicted on our tables are a suggested starting point.

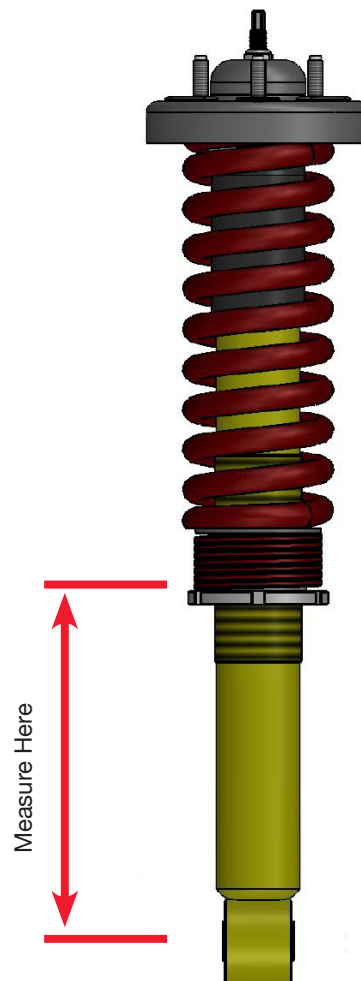

- 23. Tighten the set screw. Do not over tighten the set screw. Max torque is 1-2 Nm (1.5 ft lbs.)
- 24. Assemble the helper spring, intermediate ring, main spring, upper spring seat, and OE top mount onto the Belltech coilover.
- 25. Reference the OE strut markings and ensure the top mount is oriented in the same direction it was before disassembly.
- 26. Torque the supplied Nyloc nut onto the strut. Torque to 41 ft lbs.



## STRUT INSTALLATION

27. Install the Belltech coilover into the strut tower and secure the three OE 15mm nuts. Torque to 41 ft lbs.



28. Attach the lower strut 27mm bolt and torque to 350 ft lbs.



29. Remove the jack that was supporting the axle.


30. Replace the rear fender liners using a Philips head screw driver.

# FINALIZING THE INSTALLATION

31. Mount the wheels and tighten the lug nuts.
32. Lift the vehicle and remove the support stands.
33. Carefully lower the vehicle onto the flat ground.
34. Torque the lug nuts to 100 ft lbs.
35. Check that all components and fasteners have been properly installed and torqued.
36. Read and perform all tasks in the “Before Driving Your Vehicle” section of page 1 of your instructions.

## THANK YOU FOR CHOOSING BELLTECH.

You are now a part of the Belltech family and we are eager to catch a glimpse of your newly modified vehicle. Give us a shout out and let us know how much you love our product. Don't forget, we offer other Belltech related merchandise for you and your vehicle on our website [www.belltech.com](http://www.belltech.com)

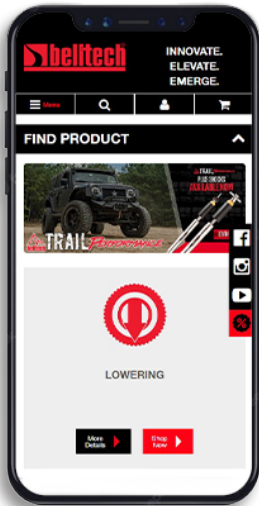

belltechsuspension



Belltech Suspension



@belltechsuspension

If you have any questions, concerns, or warranty related issues regarding your Belltech product, please call or email our experienced customer service specialists.

### Belltech Customer Support:

Phone: 1-800-445-3767

Email: [info@belltech.com](mailto:info@belltech.com)

# KIT CONTENTS



15129		
Part number	Description	Qty
15129-100	Belltech Rear Coilover	2
68510039	Spanner Wrench	1

15129-100		
Part number	Description	Qty
15129-245	Threaded damper	1
4001-001	Helper Spring	1
76060-400-993	Linear Spring	1
15002105	Vent Disc	1
65210799	Bump Stop	1
65210800	Dust Boot	1
4935-001	15mm Packer	1
4936-001	25mm Packer	3
152600-003	Upper Spring Adapter	1
68320103	Set Screw	1
15000-013-961	Intermediate Ring	1
65050018	Threaded Spring Perch	1